


## Safety Signaling Relay Style ET4

### Description:

A Miniature Tractive Armature DC Neutral Track Relay plug-in-type for Railway Signalling purpose. **General Data:**

- Nominal rated voltage: 0.5 V DC.
- Standard Contact Arrangement: 2F, 2F/1B (also other contact arrangements available).
- Contact rating: Continuous 3 Amps.
- Weight: 1.8 kgs. (approx).
- Environmental Characteristics: exceeds BS 2011.
- Excellent Vibration / Shock characteristics.

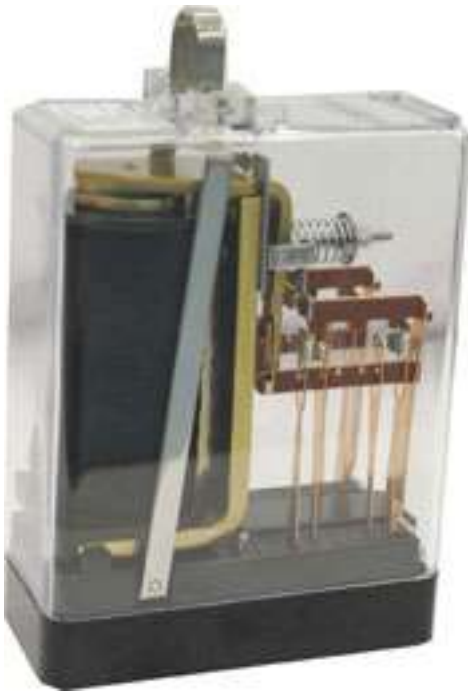

### Features

- Safety signaling relay conforming to BR Standard giving high level of reliability over 1 million in service.
- Fine Silver to Silver Impregnated Graphite safety contact prevent welding.
- Fine Silver moving contact riveted and soldered on to Phosphor Bronze Spring to ensure good electrical connection.
- Armature Torque provided by gravity and Helical Spring maintaining front contact gap when relay de-energized.
- Moulded relay base, which interlocks with its respective Plugboard.

## **Safety Signaling Relay Style ET4 - TECHNICAL DATA**

[Click to View](#)

Ordering Particulars Please specify the following details when ordering :

### **RELAYS**

- Rated Voltage
- Contact Arrangement
- PIN Code

### **PLUGBOARD AND ANCILLARY PARTS**

- Plug board drill No.
- No. of Connectors
- Relay fixing clip